


KERSTEN®

ELECTRODE

DE 209

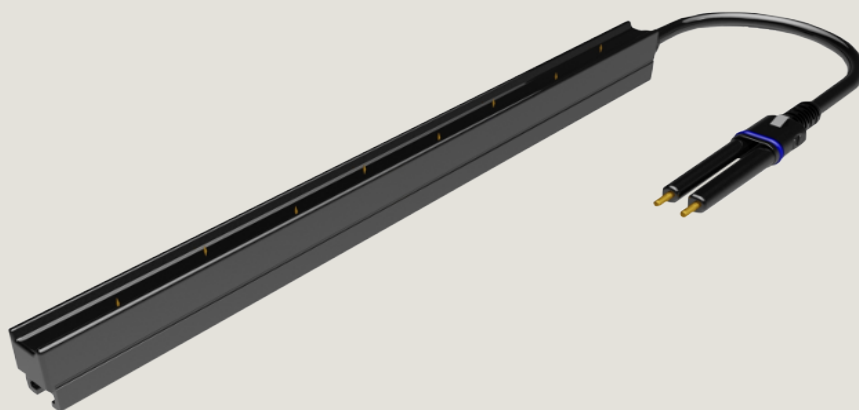

Our most popular discharging electrode. DE 209 ensures the effective elimination of existing static charge on different materials and optimizes your process.

THE PRODUCT

PRODUCT BENEFITS

- Safe to touch
- Small electrode cross-section
- Vacuum-casted
- Customizable to individual lengths

CUSTOMER BENEFITS

- Plug-in system
- Longlife product
- Minimal maintenance effort
- Easy to install

WHY KERSTEN?

- Made in Germany for over 40 years
- Needs-based consultation
- Tailor-made solutions
- Very short delivery times

KERSTEN®

TECHNICAL DATA

DE 209

GENERAL

Supply voltage	U	kV DC	<9.0
Power consumption per 1m electrode length at max. supply voltage	I _{max}	µA	450
Connection type			neXt® - plug-in
Grid width (tip distance)		mm	30
Available total lengths	L	mm	80 - 3050*

DETAILS

Effective distance max.		mm	380
Min. distance (lateral / in operating direction)		mm	40 / 30
Material HV Needles			Tungsten
Minimum bend radius of cable			
- Fixed installation / - Constant movement	R	mm	15 / 30

CLIMATIC CONDITIONS


Temperature during transport and storage	T	°C / °F	-25- +85 / -13- +185**
Temperature during operation	T	°C / °F	+5- +80 / +41- +176***
Relative humidity (non condensing)	RH		<80

DIMENSIONS

L/W/H mm L / 12 / 19

*active length = total length -40mm **acc. UL50 TypB / class 3K3 max. +70 °C (+158 °F) ***acc. UL50 TypB / class 3K3 max. +70 °C (+158 °F)

TECHNICAL DRAWING

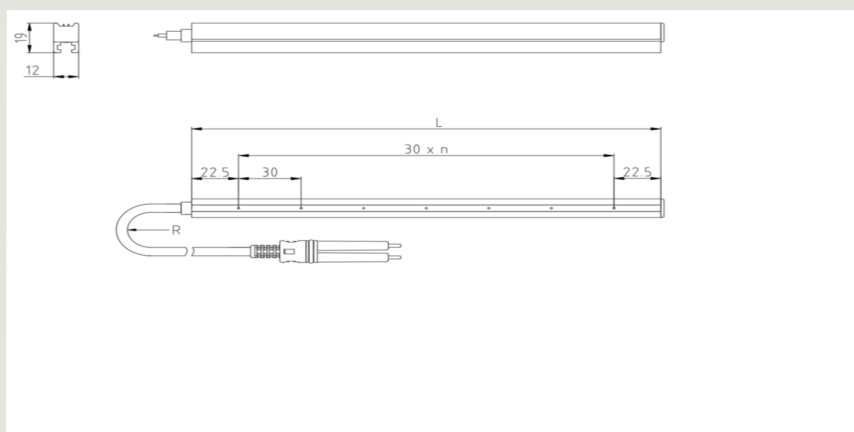

All dimension
measurements in mm

KERSTEN ELEKTROSTATIK GMBH

Walter-Knoell-Straße 3
D-79115 Freiburg | Germany
T +49 761 47944-0 | F +49 761 47944-99
info@kersten.de | www.kersten.de

